



BRICKTOWN™

PAVER TILE WITH REVEAL IMAGING®

FLOOR
& WALL



AMERICAN OLEAN®
PROVEN IN TILE™

AMERICANOLEAN.COM

BRICKTOWN™

Inspired by the vintage look of painted brick, Bricktown by American Olean® provides a familiar, inviting aesthetic to both walls and floors. The inherently warm appeal and versatile style of brick creates a timeless design that is both modern and minimal. Bricktown highlights this classic look by offering a contemporary variation to traditional brick in neutral tones that complement a variety of textures and settings.

Photo features Rosendal™ Urban Mocha in 6 x 36 field tile on the floor and Bricktown Cashmere Court in 2 x 8 field tile on the wall.

BRICKTOWN™

PAVER TILE WITH REVEAL IMAGING®

4 x 8 FIELD TILE



ARCTIC BEND BT07



FAWN TERRACE BT08



CASHMERE COURT BT10



GREIGE PARKWAY BT09



CHESTNUT BOULEVARD BT11



ONYX CROSSING BT12

2 x 8 FIELD TILE



ARCTIC BEND BT07




FAWN TERRACE BT08



CASHMERE COURT BT10



GREIGE PARKWAY BT09

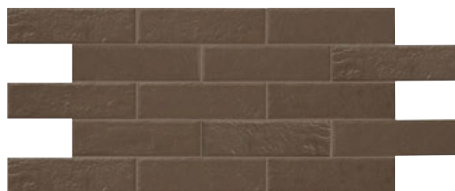

CHESTNUT BOULEVARD BT11





ONYX CROSSING BT12

BRICKTOWN™

PAVER TILE WITH REVEAL IMAGING®

SIZES, SHADE VARIATION & PRICING

	
4 x 8 FIELD TILE (3-7/8" x 8") (9.80 cm x 20.30 cm)	2 x 8 FIELD TILE (2-1/4" x 8") (5.70 cm x 20.30 cm)



TILE THICKNESS: 7/16"
RECOMMENDED GROUT JOINT: 3/8"
RELATIVE PRICING: Medium

HIGH (V3)

PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOH'S	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Field Tile	< 3.0%	> 400 lbs.	8.0	Resistant	-N/A-

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

SETTING

- Latex modified thin-set
- Epoxy

GROUTING

- Sanded grout
- Epoxy grout

FLOOR APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level - Interior	N/A	●
Wet & Level - Interior	≥ 0.42	●
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	○
Ramps & Inclines	≥ 0.65	○

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

OTHER APPLICATIONS

	SUITABLE
Walls/Backsplashes	●
Countertops	●
Pool Linings	●

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Cover photo features Rosendal™ Alabaster Motif in 6 x 36 field tile on the floor and Bricktown Cashmere Court in 2 x 8 field tile on the wall.

NOTES

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

All or select items within this series are made in the USA. For more information visit americanolean.com/MadeInUSA.

For additional information, refer to "Factors to Consider" at americanolean.com/Factors.



PRE-CONSUMER RECYCLED MATERIALS



MADE IN THE U.S.A.



REVEAL IMAGING®



Naturally, many of our products can help you earn LEED™ credits.

888.AOT.TILE

©2016 AMERICAN OLEAN



AMERICAN OLEAN®
PROVEN IN TILE™